


Top Mount Calibration for TD-4000

Two Point Calibration

Setting Empty: (four different options)


Either start with a empty tank or remove the spear from a full tank or place a portion of the spear into a full tank to set empty point other than the tank actually being empty.

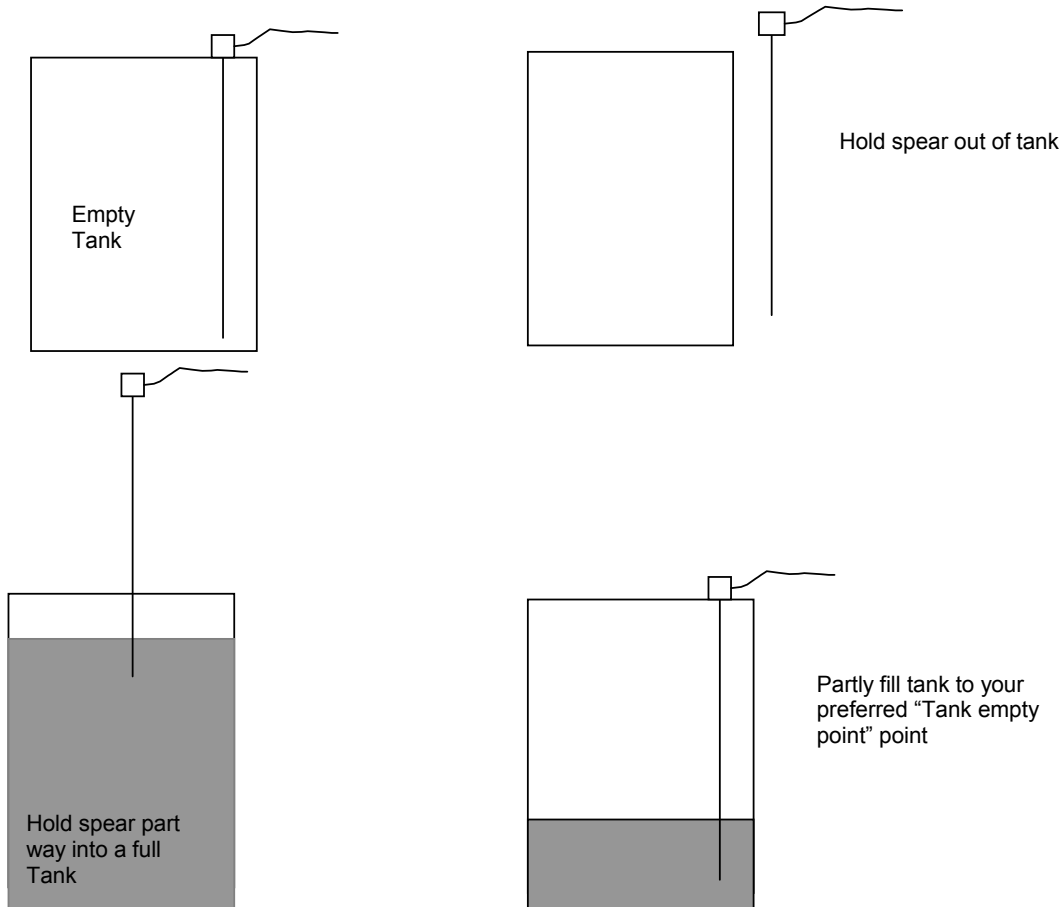

Please Note: The true EMPTY point is the level of the pump-out pump fitting as it can never be emptied below this point.

Follow directions on screen



Setting Full:



Insert the spear into a full Tank

Five Point Calibration:

You can either fill the tank to the set points or if you know the point heights you can mark the spear and insert into a fill tank to the marked points setting each point as you insert the spear.

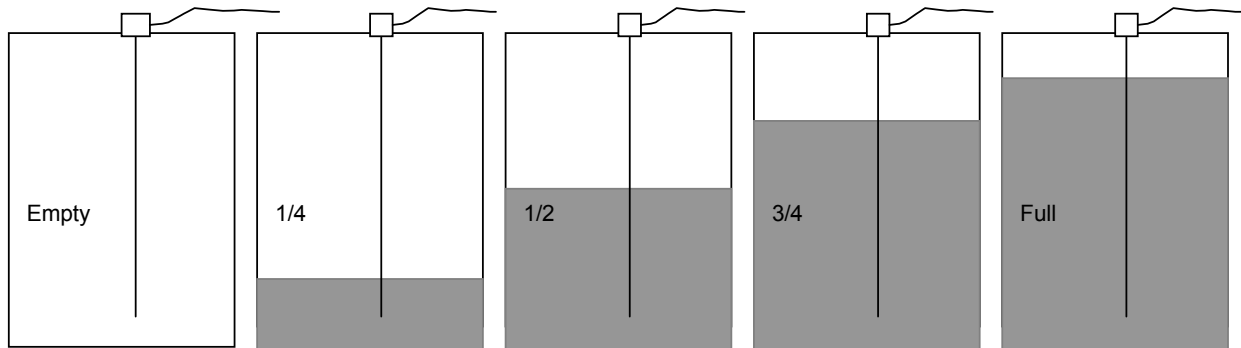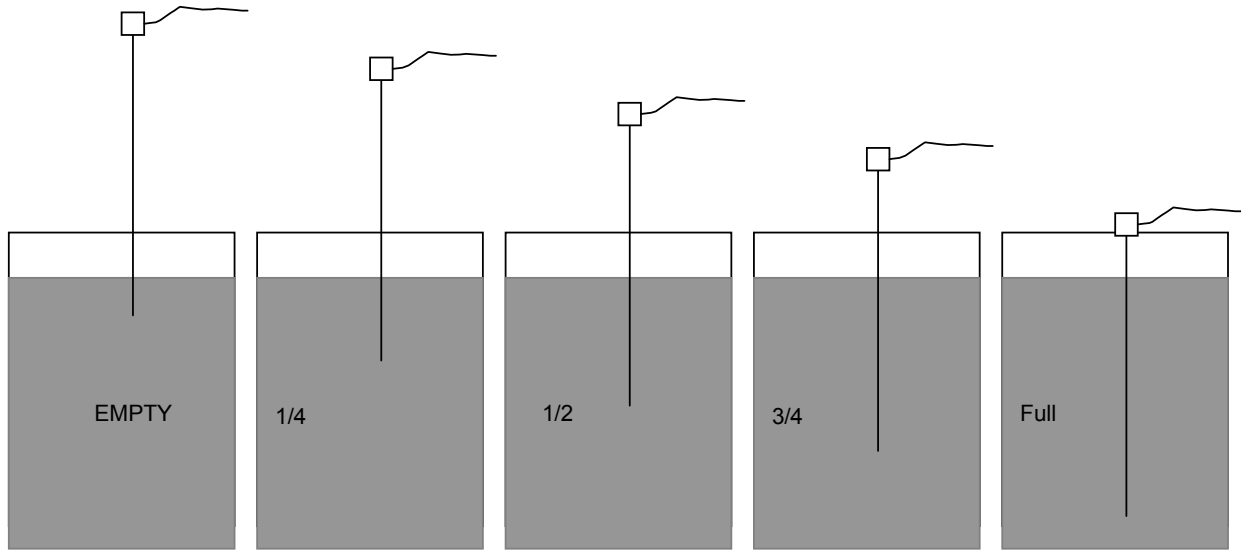

Follow directions on screen

©
All technologies, design and Intellectual property is owned by
Smart Switch Technologies Ltd
Po Box 272, Waikanae. NZ
Email: info@smartswitch.co.nz Web: www.smartswitch.co.nz